


**NOTES:**

1. THIS STANDARD APPLIES TO ALL CUTS AND ARTERIAL STREETS AND ALL PAVEMENT LESS THAN 5 YEARS OLD.
2. OVERLAY AREA MAY BE MODIFIED BY CITY ON OLDER PAVEMENT DEPENDING ON CONDITIONS OR SCHEDULED CONSTRUCTION/MAINTENANCE.
3. ADJUST ALL UTILITY CASTING TO FINISH GRADE AND RESTORE CHANNELIZATION AND LOOP DETECTORS.
4. POTHOLES TO BE RESTORED WITH A 1' T-CUT. IF AFTER THE 1' T-CUT THE PATCH IS MORE THAN 4'x4', A GRIND AND OVERLAY IS REQUIRED UNLESS OTHERWISE APPROVED BY PUBLIC WORKS. IF THE PATCH IS WITHIN 2 LANES OF TRAVEL, THE GRIND AND OVERLAY WILL BE REQUIRED ON BOTH LANES. 50' MIN. LENGTH.
5. INTENDED ONLY FOR DRIVING LANE



**STANDARD DETAIL  
ASPHALT OVERLAY  
FOR TRENCH REPAIR**

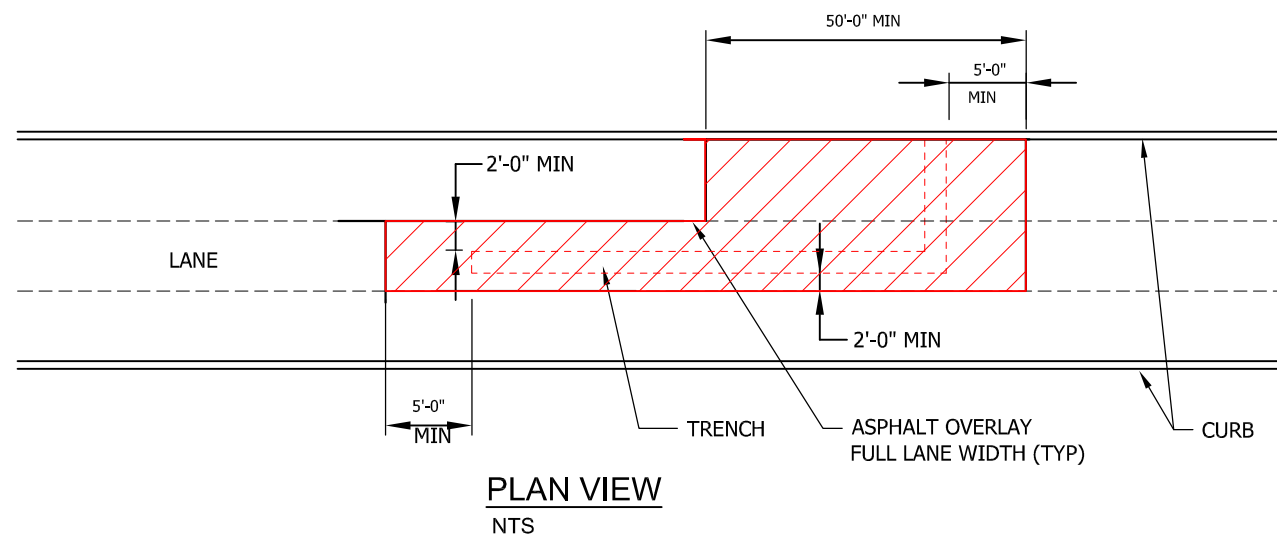

REVISIONS	DATE	INITIAL

DATE DRAWN 10/02/2020	CHECKED	DATE APPROVED
DESIGNED CAW	APPROVED BY	STANDARD SPECIFICATIONS