

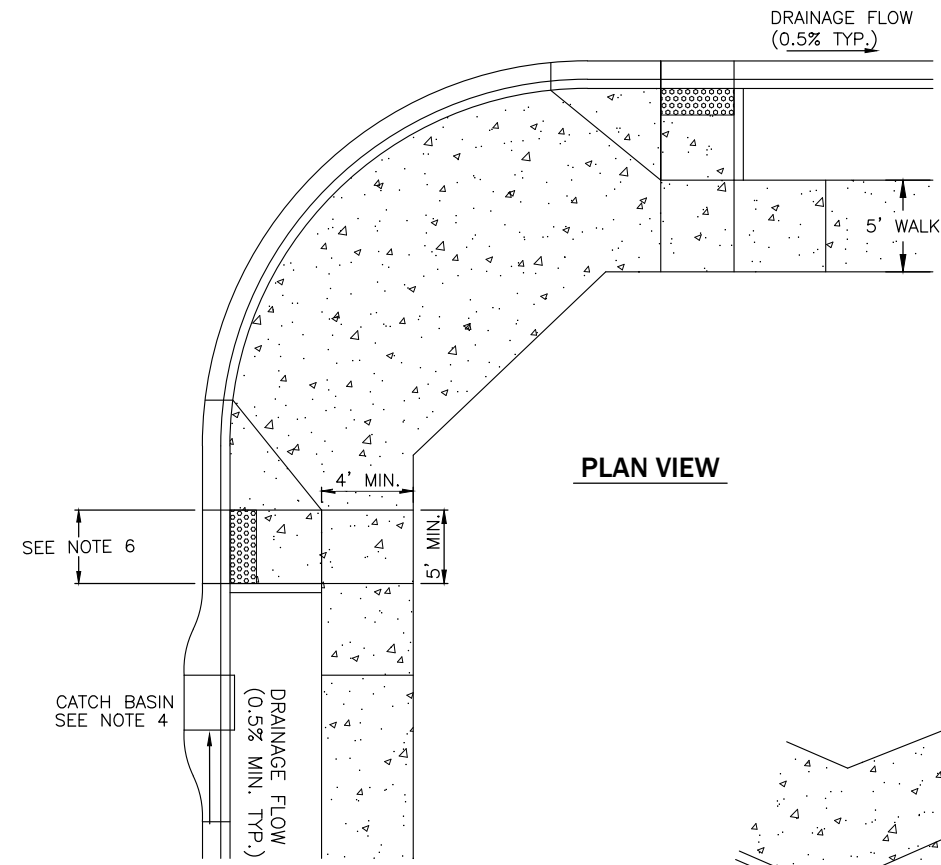


**BI-DIRECTIONAL CURB RAMPS**

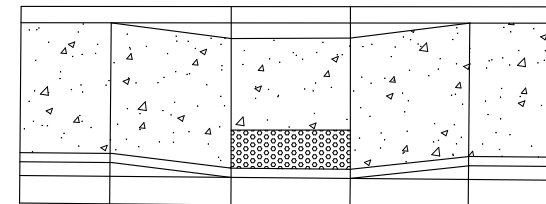

**PERPENDICULAR CURB RAMPS**

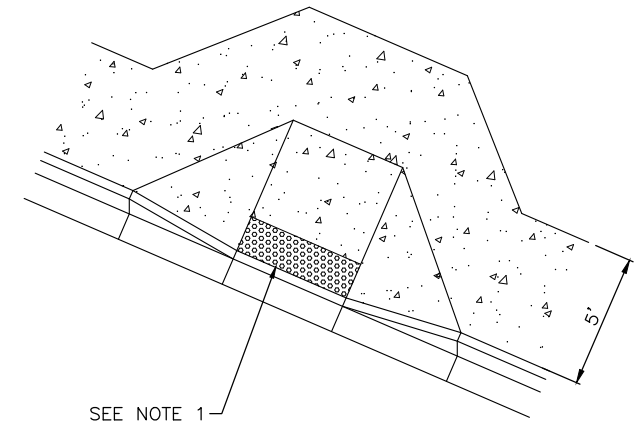


**PARALLEL CURB RAMPS**

**NOTES:**

1. DETECTABLE WARNING SURFACE PER WSDOT STD. PLAN F-45.10
2. RAMP AND APPROACHES SHALL BE CLEAR OF OBSTACLES INCLUDING HYDRANTS, POLES, AND INLETS.
3. RAMP CENTER LINE SHALL BE PERPENDICULAR TO THE RADIAL TO CURB RETURNS UNLESS OTHERWISE APPROVED BY ENGINEER.
4. CATCH BASINS SHALL BE PLACED UPSTREAM FROM PEDESTRIAN RAMPS, AS REQUIRED BY PROJECT DRAINAGE PLANS.
5. CURB SLOPE SHOULD NOT EXCEED 2% ACROSS RAMP. MAY BE INCREASED TO 5% AT NON-STOP CONTROLLED INTERSECTIONS.
6. RAMP TO BE 4-FT WIDE WHEN CORNER IS PAVED OR 5-FT WIDE WHEN CORNER IS LANDSCAPED.

**STANDARD DETAIL  
DIRECTIONAL  
CURB RAMPS**

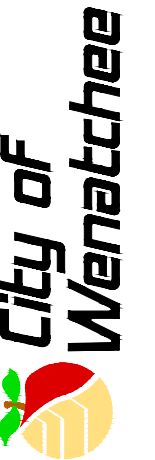

SCALE: AS SHOWN	DESIGNED	DRAWN CAW	APPROVED BY	STANDARD SPECIFICATIONS	REVISIONS	
					DATE	INITIAL
01/28/21	CHECKED		DATE APPROVED			

DETAIL NO.  
R-120

PAGE  
1 OF 1