



1 CLEANOUT PLAN VIEW
Scale: N.T.S.

NOTES:

1. ALL CONNECTIONS MUST BE APPROVED BY THE CITY OF WENATCHEE AND INSTALLED PER MANUFACTURER RECOMMENDATIONS.
2. THE SANITARY SEWER LATERAL, INCLUDING THE TAP, SADDLE, TEE, PIPE, AND CLEANOUT IS CONSIDERED "PRIVATE" UPSTREAM OF THE MAIN LINE POINT OF CONNECTION.
3. MINIMUM 6-INCH DIAMETER CLEANOUTS SHALL BE CONSTRUCTED ON ALL SEWER LATERALS. THE VERTICAL RISER SHALL BE OF EQUAL SIZE AS THE LATERAL PIPE OR LARGER.
4. CLEANOUTS MAY BE LOCATED IN THE PLANTER STRIP AT THE BACK OF WALK, IF ONE EXISTS, AND SHALL BE VISIBLE AT FINISHED GRADE. CLEANOUTS LOCATED BELOW FINISHED GRADE SHALL HAVE ACCESSIBLE COVERS.
5. CLEANOUT FRAME AND COVER SHALL BE HEAVY DUTY, BOLT DOWN EAST JORDAN MODEL 3675 OR APPROVED EQUAL AND LABELED "SEWER" OR "CLEANOUT".
6. MAXIMUM CENTER-TO-CENTER SPACING BETWEEN CLEANOUTS SHALL BE 2'-0". MODIFICATIONS TO THIS SPACING REQUIRE THE APPROVAL OF THE ENGINEER.
7. CONCRETE PAD FC' SHALL BE 3,000 PSI OR GREATER.
8. ALL #4 REBAR SHALL HAVE 2-INCH MINIMUM COVER.
9. OPTIONAL CLEANOUT CONFIGURATION

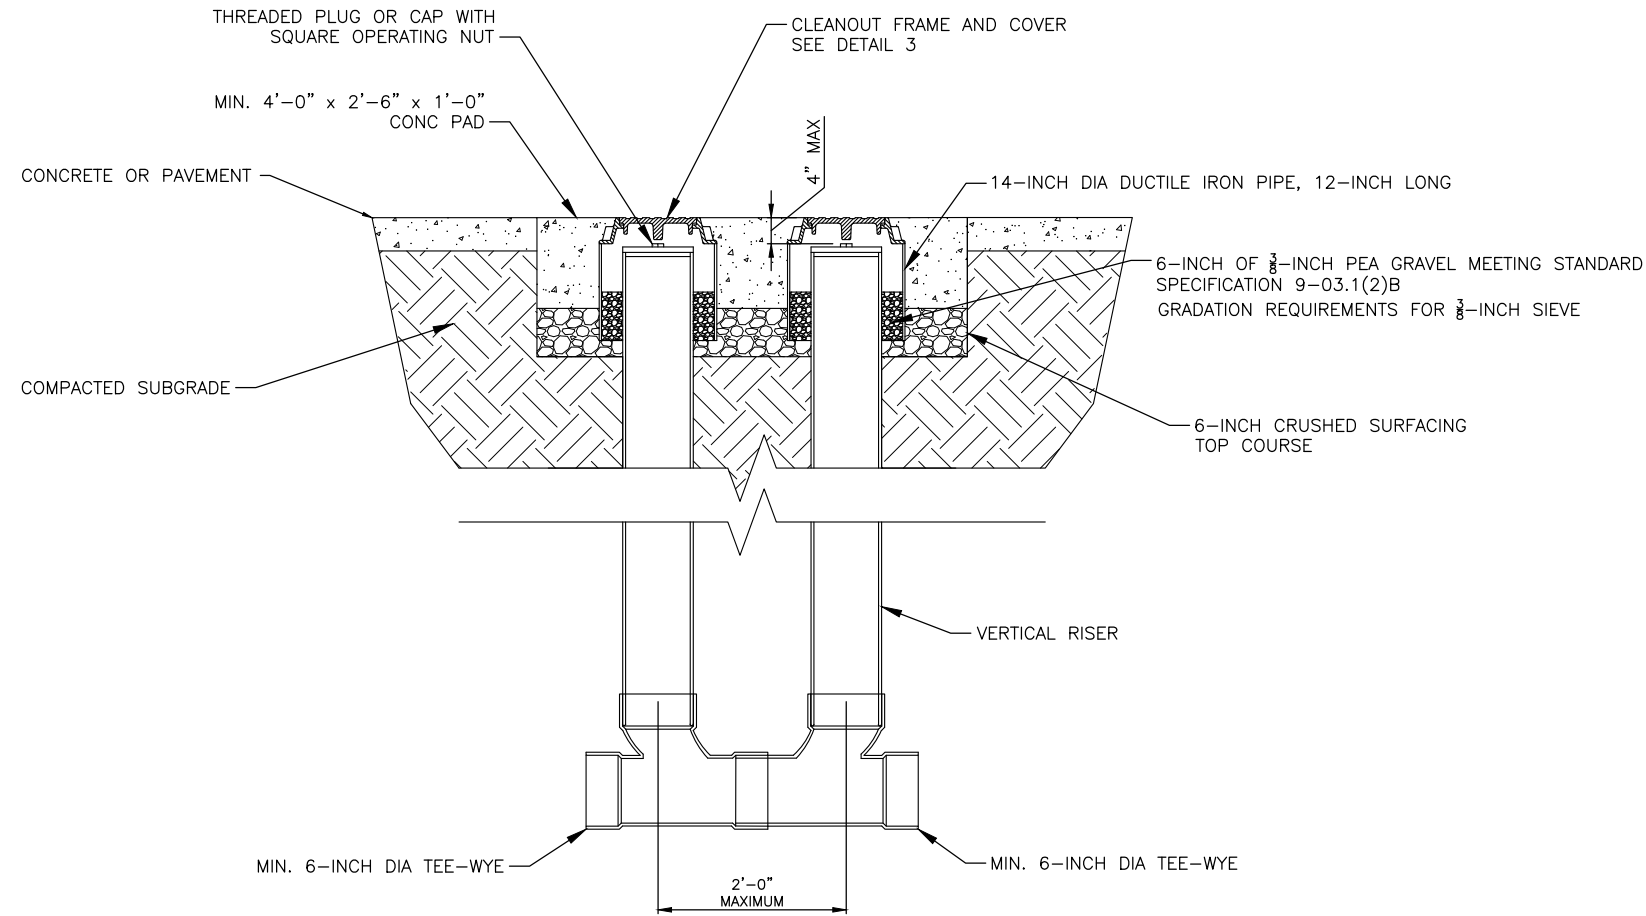

2 CLEANOUT DETAIL
Scale: N.T.S.

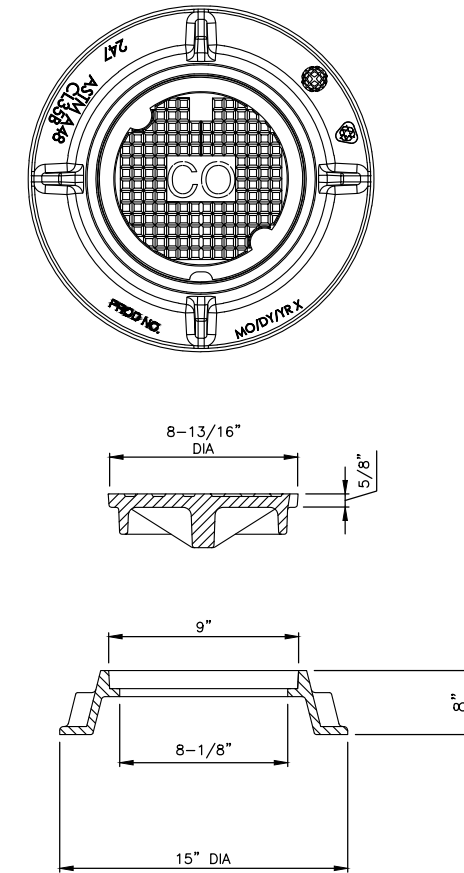

3 CLEANOUT FRAME AND COVER
Scale: N.T.S.

**STANDARD DETAIL
SANITARY SEWER
DOUBLE CLEANOUT**



SCALE:	DATE DRAWN	DESIGNED	DRAWN	APPROVED BY	DATE APPROVED	REVISIONS
AS SHOWN	3/9/2020	SRD	SRD			
	CHECKED					
	DATE	INITIAL				
	03/31/2023	JTB				

STANDARD SPECIFICATIONS
WSDOT 7-08 GENERAL PIPE INSTALLATION
WSDOT 7-18 SIDE SEWERS
WSDOT 7-19 SEWER CLEANOUTS

DETAIL NO.
S-120