









S - 310

PAGE 1 OF 1

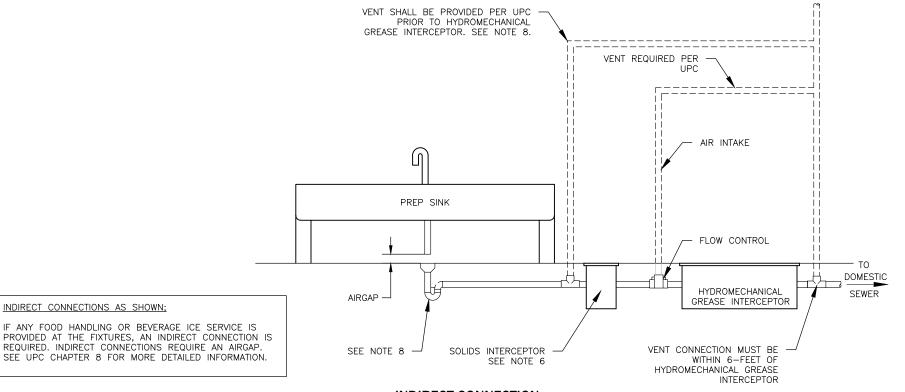

INDIRECT CONNECTION

INDIRECT CONNECTIONS AS SHOWN;

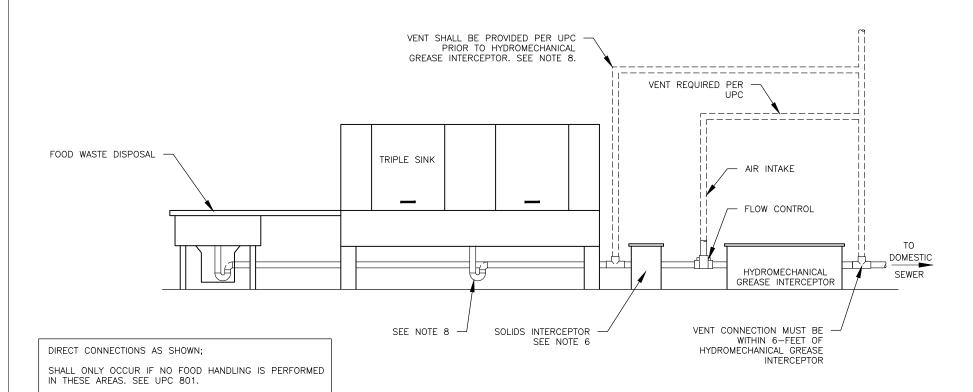

DIRECT CONNECTION

11 DISHWASHER WASTE MUST NOT PASS THROUGH THE INTERCEPTOR.

SEPARATE LINE DOWNSTREAM OF THE INTÉRCEPTOR.

PROVIDED BETWEEN THE FIXTURES AND INTERCEPTOR.

NOTES:

12 NOT MORE THAN FOUR (4) SEPARATE FIXTURES SHALL BE CONNECTED TO OR . DISCHARGE INTO ANY ONE INTERCEPTOR.

9. ALL WASTE SHALL ENTER THE INTERCEPTOR THROUGH AN INLET PIPE ONLY.

10 "GRAY WATER ONLY", DOMESTIC (SANITARY) SEWER SHALL BE CONVEYED BY A

1. HYDROMECHANICAL GREASE INTERCEPTORS INSTALLED IN LIEU OF EXTERNAL GRAVITY GREASE INTERCEPTORS ARE ONLY ALLOWED WITH THE WRITTEN

2. MINIMUM REQUIRED FLOW RATE OF 20 GALLONS PER MINUTE AND GREASE RETENTION CAPACITY OF 40 POUNDS.

3. ALL INTERCEPTORS WILL BE APPROPRIATELY SIZED TO THE UNIFORM PLUMBING

4. INSTALL THE INTERCEPTOR IN AN ACCESSIBLE LOCATION FOR EASE OF BOTH MAINTENANCE AND INSPECTIONS. THE TOP CLEARANCE SHALL PROVIDE TWO

6. IF A FOOD WASTE DISPOSAL IS CONNECTED, THEN THE INTERCEPTOR MUST HAVE

INDIVIDUALLY TRAPPED AND VENTED IN AN APPROVED MANNER. VENTING AND FLOW CONTROL DEVICES ARE TO BE LOCATED IN A READILY ACCESSIBLE AND

A SOLIDS INTERCEPTOR INSTALLED PRIOR TO THE FLOW CONTROL DEVICE.

7. IF A SOLIDS INTERCEPTOR IS NOT REQUIRED, THEN A WATER SEAL MUST BE

8. EACH PLUMBING FIXTURE CONNECTED TO THE INTERCEPTOR SHALL BE

5. FOOD WASTE DISPOSALS MUST BE CONNECTED TO THE INTERCEPTOR.

PERMISSION OF THE PUBLIC WORKS DIRECTOR.

CODE OR OTHER ACCEPTABLE SIZING METHOD.

TIMES THE PHYSICAL DEPTH.